



Solar Monitor

SM2-MU (Main Unit)

Version BASIC

- new basic version of Solar Monitor
- provides actual data of PV plant
- shows graphs and statistics stored in its memory
- sends alarms via e-mails
- simple configuration using web interface
- allows sending data to remote storage

Technical specification


Data Storage	8GB µSD card
User Interface	RJ45 (100BASE-T)-100Mbit/s, compatible with 10/100/1000 Mbit/s networks
Protocols	HTTP, SOAP, DNS, UDP Setup, Telnet, ARP, ICMP, SMTP
Inverter Interface	RS485 / RS422
Inputs	DI3 (S0 electrometer connection), optically isolated



Solar Monitor

SM2-MU (Main Unit)

Version BASIC

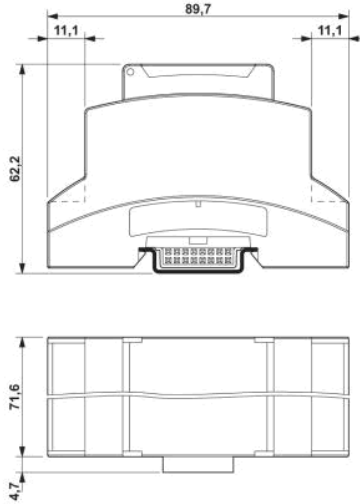

Mechanical Data

Dimensions	71,6 x 89,7 x 62,2 mm
Terminal	Diameter 0,5 mm ² - 1,5 mm ²
Operating Temperature	0 °C to +70 °C
LEDs	Status, RS485, Sensors
Installation	DIN rail

Electrical Specifications

Power	9-35 V, typ. 1,2 W
DI3	8-80 V

www.solarmonitor.cz

Solar Monitor s.r.o., Czech Republic
28. října 17, Turnov, +420 481 313 661